


FMR grab clamp for wrapped round bales

It is designed for handling and loading wrapped bales with diameter from 90 to 160 cm. The implement booms apply an even pressure on the bale without damaging the coating film. Its use requires a loader equipped with third hydraulic line. By manually removing the proper pin, it is possible to move the floating booms of the clamp asymmetrically.

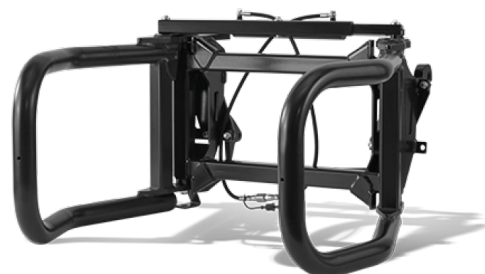

Technical data sheet

			FMR
Maximum width			2125
Maximum usable width			1950
Minimum width			895
Forks length			1412
Implement height			845
Weight			289
Max. load capacity			1000
Bale size (min./max.)			800 / 1250
Additional hydraulic lines			1

N.B. Technical data and images are indicative and not binding, as they may also vary depending on the type of tractor equipped